

Comprehensive Review of Latest e-Nose Sensor Technologies

¹Gowdhaman, P., ¹Venkatesan, T., ²Banupriya, R., ³Nimal, A. T., ¹Haresh M Pandya*

¹Department of Physics, Chikkanna Government Arts College, Tiruppur, TN, India.

²Department of Physics, Gobi Arts and Science College, Erode, TN, India.

³Solid State Physics Laboratory, DRDO, New Delhi, India.

Received: 28.12.2019 Accepted: 02.02.2020

Abstract

Sensor technology is a rapidly developing field and the ubiquitous nature of a sensor in present-day today's life is evidently observed by one and all. Even so, fabricating a chemical sensor that can detect and distinguish multiple gas vapors in a harsh environment is a big challenge. Many commercially available gas sensors have various inbuilt disadvantages and can rarely be used whenever the detection of multiple toxins in the air is absolutely necessary. The solution to this problem, therefore, lies in integrating experimental sensing by devices to library pattern recognition systems. The subsequent sensor is called an electronic nose or e-Nose and it displays an array of sensors with different sensitive coatings for sensing multiple analytes. The present research paper focuses on a comprehensive review of the design and development of the latest e-Nose sensor technologies from 1994 onwards with special reference to detection and identification of the minimal amount of toxic agents / chemical warfare agents in a complex dynamic environment with their advantages and disadvantages.

Keywords: Artificial Nose; SAW Sensors; e-Nose technology; Gas Sensors; Sensing Layer.

1. INTRODUCTION

Over a decade, sensors have been predominantly used to detect and respond to physical environment changes such as light, heat, moisture, pressure, motion, or any other environmental phenomena. Specific physical inputs any of nature are converted to machine readable electrical signals at the sensor location or digitally transferred over a network for reading or further processing (Xu and He, 2017; Abel *et al.* 2018; Sayago *et al.* 2019). As such, present day advancements in sensing technology have been receiving increasing attention in both academic and industrial applications. Among the available sensing technologies, gas sensing technology has become progressively significant because of its widespread applications (Cheeke and Wang, 1999; Nimal *et al.* 2009; Liu *et al.* 2012; Cochrane *et al.* 2016; Xu and He, 2017; Gowdhaman *et al.* 2018; Majchrzak, 2018) in the areas not limited to,

- industrial production (e.g., food quality testing, methane detection in mines);
- automotive industry (e.g., detection of polluting gases from vehicles);

- medical applications (e.g., electronic noses simulating the human olfactory system);
- indoor air quality supervision (e.g., detection of carbon monoxide);
- environmental studies (e.g., greenhouse gas monitoring, air quality measurements);
- defence security (e.g., detection and identification of chemical warfare agents) etc.

Till date, the human nose or a mammalian nose has been recognized as the primary instrument to sense smell or flavor of various industrial products. Olfactory receptor cells in them have high sensitivity of the order of ppm level and that is believed to be responsible for sensing. However, these olfactory receptor cells are not reliable completely for sensing as toxic compounds as they damage these organic cells beyond repair. Thus, mimicking the remarkable performance of a human/mammalian olfactory system is highly challenging. (Gardner and Bartlett, 1994; Keller, 1995; Arshak *et al.* 2004; Bogue, 2006; Scott *et al.* 2006; Burian *et al.* 2010; Gongora *et al.* 2018). Thus, in recent times, significant attempts have been made to develop an electronic instrument capable of imitating the human nose remarkable ability.

*Haresh M. Pandya

email:haresh.pandya@rediffmail.com

Performance of such sensors in a dynamic environment and their subsequent calibration cum analysis brings to the fore many of its latent inherent limitations which needs to be efficiently addressed before such a sensor is to perform as an e-Nose, detecting and distinguishing multiple vapours at the same time (Keller, 1995; Schaller *et al.* 1998; Gole and Lewis, 2007; Liu *et al.* 2012; Laquintinie *et al.* 2019). Combined process of analysing and subsequent neutralization of gas sensors improves sensitivity by about three orders of magnitude, removes drift and provides discrimination between several thousand odors from a mixture of toxins in the environment.

The detection and quantification of chemical species is the key objectives of a chemical e-Nose sensor. There are many conventional analytical techniques, such as gas chromatography- mass spectrometry or ion mobility spectrometry developed for these purposes. These techniques have many pros and cons, the former related with their selectiveness and sensitiveness and the latter with their high price, environment and maintenance requirements, bulkiness, as well as the requirement of highly trained personnel (Cosio *et al.* 2012; Hosseini and Hamdy Makhoulf, 2016; Xu and He, 2017; Majchrzak, 2018). Moreover, these conventional methods are not only time-consuming but the results are often inadequate and not total. Consequently, there is enormous demand for an electronic instrument that can mimic the human sense of smell and provide prompt low cost sensory information (Keller, 1995; Cheeke and Wang, 1999; Arshak *et al.* 2004; Gowdhaman *et al.* 2018).

The sensing ability of a chemical sensor relies on sensing material. Metal oxides, supramolecular structures, carbon nanotubes, molecularly imprinted polymers, self-assembled monolayers and a variety of other polymers have been widely exploited as a sensing material for chemical sensors (Nimal *et al.* 2009; Raj *et al.* 2010; Hosseini and Hamdy Makhoulf, 2016; Gowdhaman *et al.* 2018). Development of suitable nanomaterials with enhanced sensitivity and selectivity will help improve the performance of such a chemical vapour sensor.

Chemical sensors that detect explosives and chemical warfare agents are of special interest in this regard in a fast-moving globally interconnected world. Chemical warfare agents and explosives are major societal threats (Nimal *et al.* 2009; Raj *et al.* 2013; Hosseini and Hamdy Makhoulf, 2016; Devkota *et al.* 2017; Aid, 2019). Their real-time detection is a big challenge that is being tackled from an instrumental and chemical viewpoint for homeland and civil security applications, as well as for environmental and

humanitarian endeavours (Raj, 2012; Hosseini and Hamdy Makhoulf, 2016; Singh *et al.* 2016; Gowdhaman *et al.* 2018; Aid, 2019).

Therefore, development of smart, cheap, portable sensory devices, is ushering a new era in the sensing of a target chemical species. A device designed for this purpose is therefore termed as an electronic nose or a e-Nosedevice in current parlance. This research article focus on an overview of chemical warfare agents and their importance, detection as well as the design, development and testing of such an e-Nosedevices.

2. CHEMICAL WARFARE AGENTS (CWAS) – AN OVERVIEW

Chemical Warfare Agents (CWAs) are hazardous chemical substances prepared to incapacitate, or be lethal (War and War, 1918; Raj, 2012; Venkatesan and Hareesh 2013; Raj *et al.* 2013; Devkota *et al.* 2017; Tripathi *et al.* 2018; Aid 2019). The toxic property of these CWAs kills, injures or incapacitates living organisms. More than 70 different chemicals have been recognized as chemical warfare agents and these agents are available in solid, liquid or gaseous phases. Based on the toxic level and its effect on living organisms, these are classified as:

- blistering or vesicating agents (Eg. mustards, lewisite),
- nerve agents (Eg. sarin, soman, cyclohexylsarin, tabun),
- vomiting agents (Eg. adamsite),
- tear agents (Eg. Benzyl chloride, Capsaicin, Ethyl iodoacetate),
- blood agents (Eg. Cyanogen chloride, Arsine),
- choking agents or lung toxicants (Eg. chlorine, phosgene, diphosgene),
- incapacitating agents (Eg. anticholinergic compounds),
- lacrimating or riot control agents (Eg. pepper gas, Chloroacetophenone),
- Cyanides, or binary and non-traditional agents

Research on the detection of chemical vapour agents have been underway by many (Gardner and Bartlett, 1994; Keller, 1995; Schaller *et al.* 1998; Arshak *et al.* 2004; Hosseini and Hamdy Makhoulf, 2016; Benetti *et al.* 2019). As these chemical compounds are presented in vapor and solution form, their lethality, along with their ease of synthesis, colourless and odourless nature underscores the need of their detection (Liu *et al.* 2012; Singh *et al.* 2016; Devkota *et al.* 2017; Gongora *et al.* 2018; Aid, 2019; Benetti *et al.* 2019). In fact, every year the anthropic activities produce billions of tons of chemical contaminants that are released in air, water, and soil. Further, there is always an apprehension

that rogue element in a country can effectively manipulate these chemicals for massive large scale terrorist attacks on a nation. Thus, chemical sensors to detect CWAs and volatile organic compounds (VOCs) are to be highly sensitive, selective, quickly responsive, reversible as well as being compact (Liu *et al.* 2012; Singh *et al.* 2016; Devkota *et al.* 2017; Gongora *et al.* 2018; Aid, 2019; Benetti *et al.* 2019).

Fig. 1 presents quick outlook of different gas sensing techniques available today. Different detection techniques and methodologies have been used to achieve the goal of detection of CWAs in a real-time manner, while also meeting the affordability and portability criteria. For instance, remote or standoff monitoring has been carried out by infrared - Raman spectroscopy, on-the-spot detection by colorimetric, surface acoustic wave sensors, ion mobility spectrometry, flame photometry, photo ionization, electrochemical detection, and carbon nanotube gas

ionization sensors (Arshak *et al.* 2004; Alizadeh and Hamedsoltani, 2016; Hosseini and Hamdy Makhlof, 2016; Xu and He, 2017; Gowdhaman *et al.* 2018).

Detection and recognition of an analyte in a harsh environment is a challenging task (Gowdhaman *et al.* 2018) which cannot be achieved with the help of a single sensor. For Sensing of different gases in a mixture, one will need highly selective sensors. Even if this is achieved, the number of sensors will be equal to the number of target gases, which is a difficult task. Therefore, some of these techniques use an array of sensors either based on a set of metal oxides, polymers, carbon nanotubes or porous silicon (PS) interfaces as sensing material for the development of a chemical sensor (Gole and Lewis, 2007). These sensor responses are analyzed using an algorithm called pattern recognition system.

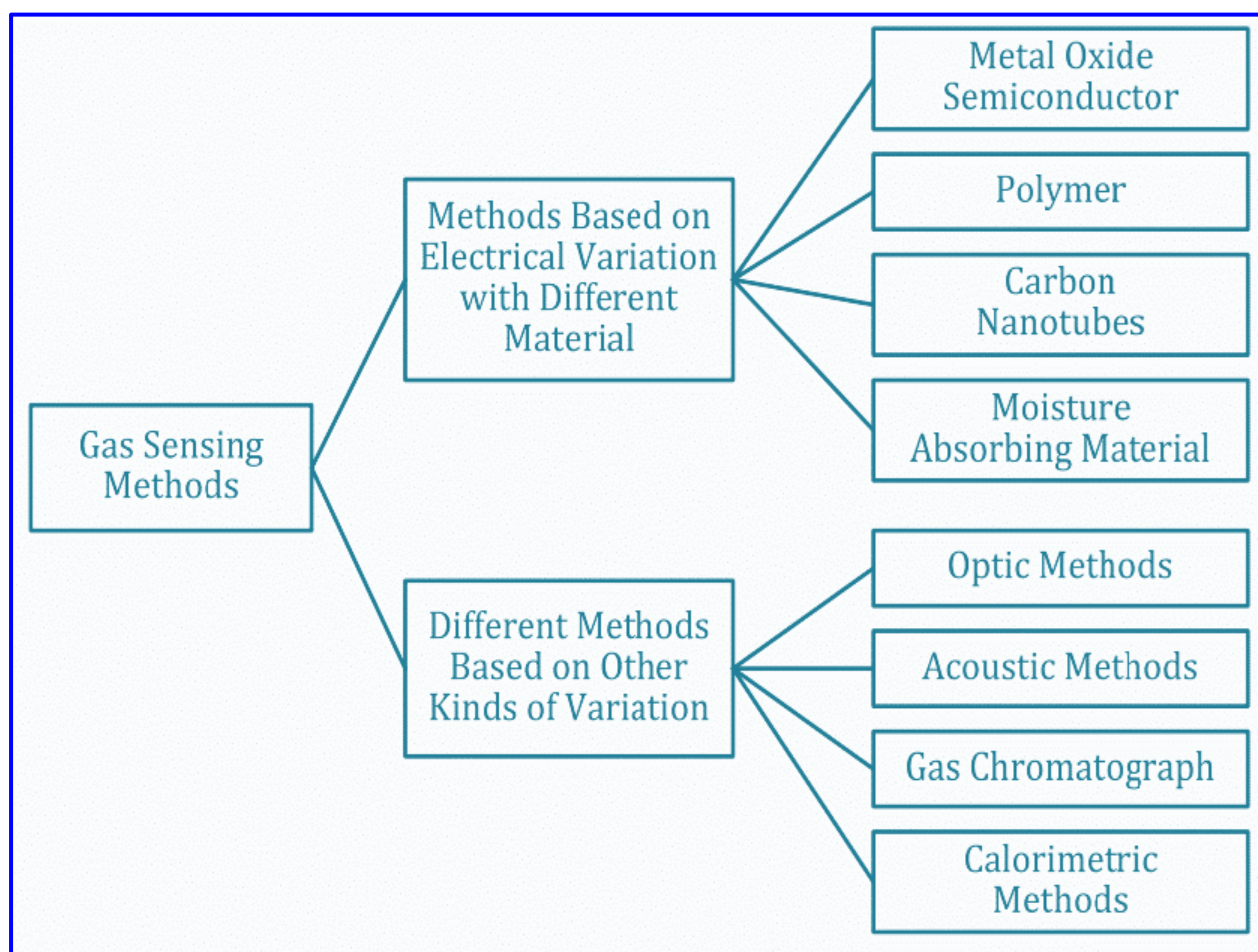


Fig. 1: Classification of chemical vapour sensing methods.

3. ELECTRONIC NOSE OR E-NOSE

An electronic nose is an instrument, which is designed and developed as a system for automatic detection and classification of odors, vapors, and gases. Electronic noses have been commercially available since 1990s and have been primarily used for the purposes of detection, discrimination and recognition of simple and complex gaseous mixtures (Raj, 2012; Bhasker Raj et al. 2013; Binions and Naik, 2013). However, the concept of an electronic nose as an intelligent chemical array sensor system has emerged only over a decade (Scott et al. 2006; Cosio et al. 2012; Gongora et al. 2018; Benetti et al. 2019). Fig. 2 illustrates a generic architecture of such a device. It generally consists of three main elements namely:

- A system (pre-concentrator) for delivery, sampling, filtering and preconditioning of the vapour gas;
- A sensor array which converts the chemical interaction of the analyte into an electrical signal; and
- An automated pattern recognition system - a computing system which is able to evaluate the data and transform it into a human intelligible format (Keller, 1995; Bhasker Raj et al. 2012; Raj et al. 2013).

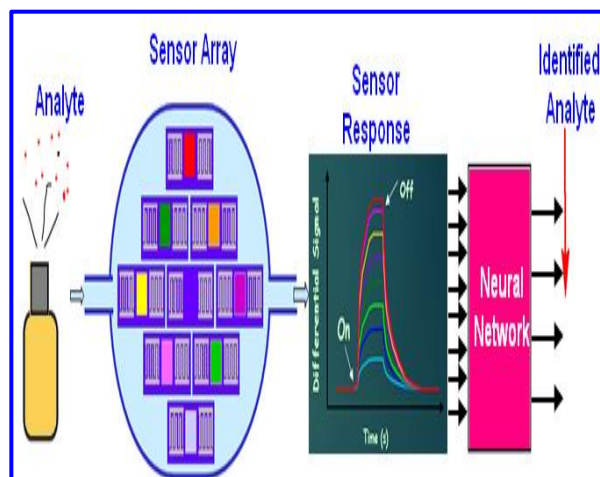


Fig. 2: The generic architecture of an electronic nose.

3.1 e-Nose Input Signal Generation and Delivery System

The e-Nose devices are initially optimized in the laboratory itself before they are taken out for any field applications. This is done to train the device to behave meaningfully and to avoid false alarms and response. Therefore, in the lab e-Nose devices are initially exposed to different vapours of interest under controlled

conditions (temperature, concentration, humidity, etc.) and subsequently, the type of response is recorded and saved for future use (Keller, 1995; Nimal et al. 2009; Raj et al. 2010; Bhasker Raj et al. 2012; Raj et al. 2013; Gowdhaman et al. 2018). Analyte vapour that needs to be tested can be generated from chemical compounds that are either available in solid or liquid phases. The analyte vapour can be either a single gas or a mixture of gases that needs to be efficiently detected by the e-nose device. Hence, initial optimization of e-Nose device is considered very crucial and the multi vapour generator (MVG) system with its design, generation and delivery system needs to be highly efficient.

Fig. 3 shows a typical block diagram of a multi-vapour generator system. F1 and F2 are thermal flasks wounded with heater wire for the generation of vapor from solids/liquids. The e-Nose device is exposed to generated gas vapours for sensing and detection. The concentration of the generated chemical vapours can be altered by MVG system by controlling the flow rate of carrier gas (preferably nitrogen) through thermal flasks and the corresponding sensing of the e-Nose device results are analyzed with respect to the detection limit of e-Nose device (say Parts Per Million or Parts Per Trillion level). M1-M5 are accurate flow controllers that controls the flow rate of carrier gas. Solenoid valves (S1 and S2) control rapid switching between carrier and target gas.

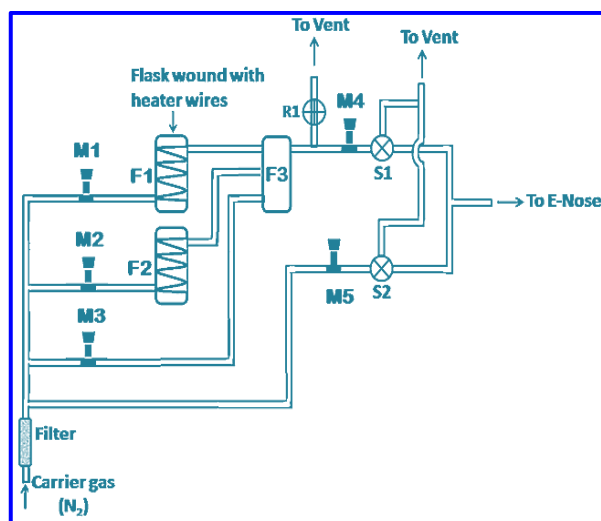


Fig. 3: A typical block diagram of a multi-vapour generator system (Gowdhaman et al. 2018)

The concentration of an analyte to be tested is calculated by the weight loss method by evaluating the evaporation rate of the analyte over different time intervals (Bunte et al. 2007; Devkota et al. 2017; Xu and He, 2017; Gowdhaman et al. 2018).

Individual sensors within the e-Nose device produce a time-dependent electrical signal (V) in response to an analyte adsorbed by the sensing layer in the e-Nose sensor array. Adsorption and subsequent desorption by the sensors in the array gives rise to a signal that rises and decays. This depends on one or more of the following parameters: (Gardner and Bartlett 1994; Liu *et al.* 2012; Xu and He, 2017; Aid, 2019).

- the flow profile and type of carrier gas;
- the nature of the analyte (Either Toxic chemical, simulant or VOCs etc.);
- the reaction kinetics of the analyte and the sensing layer;
- the diffusion of the analyte within the sensing layer;
- the nature of the sensing layer, e .g., porosity, physical structure, thermal time-constant;
- the nature of the substrate supporting the sensing layer, e .g., thermal conductivity, acoustic impedance;
- ambient conditions, e .g. temperature of sensing layer, humidity, carrier gas, pressure.

Thus, the critical component in the e-Nose device is the multi-sensor array with its unique sensitive layer that determines the type of vapours that can be detected by the sensor system.

3.2 Sensors and sensing materials for vapour classification

Any ideal e-Nose device needs to avoid false responses and efficiently discriminate and detect vapours in real time. Multiple array of sensors help in the above discrimination process. Analyte molecules undergo adsorption/absorption when they pass through the sensitive layer producing a physical/chemical change which are subsequently transduced as output electrical signal (Arshak *et al.* 2004). Figure 4 illustrates a schematic representation of frequency response due to interaction of an analyte (test gas) with the sensing layer of a SAW sensor. An overview of various sensing methods have been exhaustively discussed by many researchers through further classification according to sensing materials (Arshak *et al.* 2004; Bhasker Raj *et al.* 2012; Binions and Naik, 2013; Raj *et al.* 2013; Hosseini and Hamdy Makhlof, 2016; Tripathi *et al.* 2018; Sayago *et al.* 2019). Intrinsically conducting polymer and metal oxide, optical gas sensors, conducting polymer composite, conductivity gas sensors, surface acoustic wave (SAW) and QCM piezoelectric gas sensors, carbon nanotubes, MOSFET gas sensors and moisture absorbing materials (Arshak *et al.* 2004; Anderson *et al.* 2009; Cosio *et al.* 2012; Raj, 2012) have been effectively used for sensing. These systems offer excellent discrimination and lead the way for a new generation of “smart sensors” which have the capability to mould future commercial markets for e-Nose devices (Gardner and Bartlett, 1994; Schaller *et al.* 1998; Gongora *et al.* 2018).

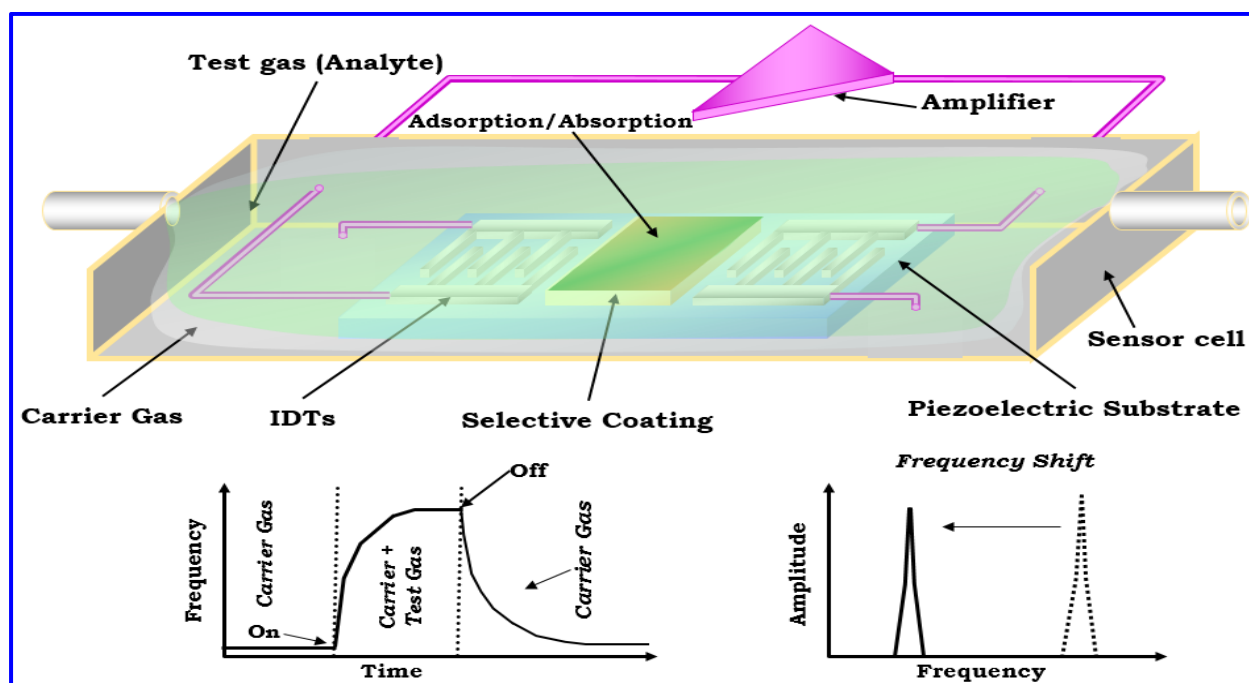


Fig. 4: A schematic architecture of a SAW sensor and its frequency response to test gas

SAW sensors with specific sensitive layers of one-dimensional(1D) metal oxide or polymer nanostructures have shown superior performance than bulk sensors due to their large surface to volume ratio and their dimensions being comparable to the extent of the surface charge region(Raj *et al.* 2010; Raj, 2012; Raj *et al.* 2013; Tripathi *et al.* 2018).

3.2.1 SAW Sensors in e-Nose Devices

Surface Acoustic Wave (SAW) technology provides a fluidic platform for sensing chemicals in gaseous and liquid states with the inherent advantages of ultra-high sensitivity, selectivity, quick response time, small size, linearity, reversibility, and ability to work in wired and wireless mode. Moreover, the technology is low cost, compatible with modern mass produced fabrication technologies, robust and resilient (Nimal *et al.* 2006; Raj *et al.* 2010; Bhasker Raj *et al.* 2012; Raj 2012; Venkatesan and Haresh M 2013; Haresh M *et al.* 2013; Raj *et al.* 2013; Banu Priya *et al.* 2014; Singh *et al.* 2016; Devkota *et al.* 2017). Proper selection of sensing layers, piezoelectric substrates, and inter digital transducers (IDTs) turn these sensors to offer excellent stability. These sensors are expected to fulfill the increasing demand with potential applications as chemical sensors in industries, pollution and emissions control, military, combustion exhausts, and other disciplines for detecting and monitoring various volatile organic chemicals (VOCs), inorganic gases, and chemical warfare agents (CWAs) amongst others (Raj *et al.* 2010; Raj 2012; Bhasker Raj *et al.* 2013; Raj *et al.* 2013; Hosseini and Hamdy Makhoul 2016; Singh *et al.* 2016; Gowdhaman *et al.* 2018). Therefore, chemical sensors based on this technology have continuously received increasing attention and focus since 1970's.

The sensing ability of these sensors rely on changes in the propagation characteristics of SAW during interaction with surface layers or the nearby environment. These sensors have wide range of operational frequency (MHz–GHz) which helps tuning the sensitivity and opens the possibility of operating these devices in wireless mode. SAW sensors have already been used for sensing several physical quantities (e.g., pressure, temperature, and stress), many chemicals and biological entities (Cheeke and Wang, 1999; Raj 2012; Liu *et al.* 2012; Binions and Naik, 2013; Banu Priya *et al.* 2014; Devkota *et al.* 2017). However, e-Noses based on SAW sensors are used only for some very specific applications like detection of chemical/biological warfare agents and explosives. Lack of precession deposition techniques for the sensitive layers is the main reason for the delayed commercial development of SAW e-Noses. This is because, SAW sensors require a uniform thickness, continuous and defect free sensitive layer along the propagation path to

prevent loss due to attenuation (Cosio *et al.* 2012; Liu *et al.* 2012; Gowdhaman *et al.* 2018).

For chemical and biological sensing, SAW devices are coated with a layer of suitable materials such as polymers, metal oxides, and metals. A detailed study of diverse polymer and metal oxide sensing layer and the applicability of these for detection of biological and chemical threats have been reported by Gowdhaman *et al.* 2018 (Gowdhaman *et al.* 2018). Any change in the mass, mechanical, piezoelectric properties of this layer upon exposure to the foreign molecules disturbs the surface waves enabling the devices to use as sensors. A study on design, modelling, development and operation of a SAW sensor and its application to e-Nose devices had been reported in some of our research article published elsewhere (Haresh, 2010; Venkatesan and Pandya, 2013; Haresh *et al.* 2013; Banu Priya *et al.* 2014; Sharma *et al.* 2014; Priya *et al.* 2016).

3.3 Pattern Recognition Tools

E-nose devices do not provide information on the nature of the compounds under investigation, but only give a digital fingerprint of an analyte. Each chemical vapor presented to the sensor array produces a signature or pattern characteristic of the vapor. By presenting many different chemicals to the sensor array, a database of signatures is built up. This database of labeled signatures is used to train and configure an automated recognition system to produce unique classifications of each chemical (Keller, 1995; Burian *et al.* 2010; Cosio *et al.* 2012; Gongora *et al.* 2018; Majchrzak, 2018).

The data generated by each sensor is processed systematically and the results are analyzed by algorithm known as pattern recognition (PR). Though this study of data is not used to infer the existence or absence of a particular chemical compound, it helps to obtain a comprehensive, multivariate description of an analyte. In fact, sensing techniques in e-Nose devices are able to provide nonspecific information of an analyte which means they group complex signals or often combine measurements which have similar properties (Raj, 2012; Bhasker Raj *et al.* 2013; Binions and Naik, 2013; Raj *et al.* 2013; Bui *et al.* 2016; Singh *et al.* 2016). Therefore, an increase in the use of multivariate statistical analysis improves evaluation and interpretation of the data of the analyte under investigation. Thus, analytes are discriminated and pattern recognition is performed to classify unknown patterns via artificial intelligence methods (Raj, 2012; Singh *et al.* 2016; Gowdhaman *et al.* 2018).

Pattern recognition reduces complexity in selection of the sensor coatings as well as it enhances the ability to characterize complex mixtures without the

need to identify and quantify individual components. It can be extrapolated and exploited to search for a pattern to correlate data, or to generate a model from a set of calibration data to predict test data (Arshak *et al.* 2004; Scott *et al.* 2006; Singh *et al.* 2016). There are many parametric (statistical), non-parametric (intelligent techniques), supervised and unsupervised tools used in pattern recognition systems for reducing multidimensional, partly correlated data into two or three dimensions. Principal component analysis (PCA), cluster analysis (CA), artificial neural network (ANN), linear discriminant analysis (LDA), and radar plots are some of the pattern recognition techniques being predominantly used by many researchers around the globe. Among these techniques Artificial Neural Networks (ANNs) are widely applied for classification purposes in e-Nose devices (Scott *et al.* 2006; Cosio *et al.* 2012; Raj *et al.* 2013; Singh *et al.* 2016).

Fig 5. Illustrate the structure of a sample ANN used to classify household chemicals. Harpreet *et al.*

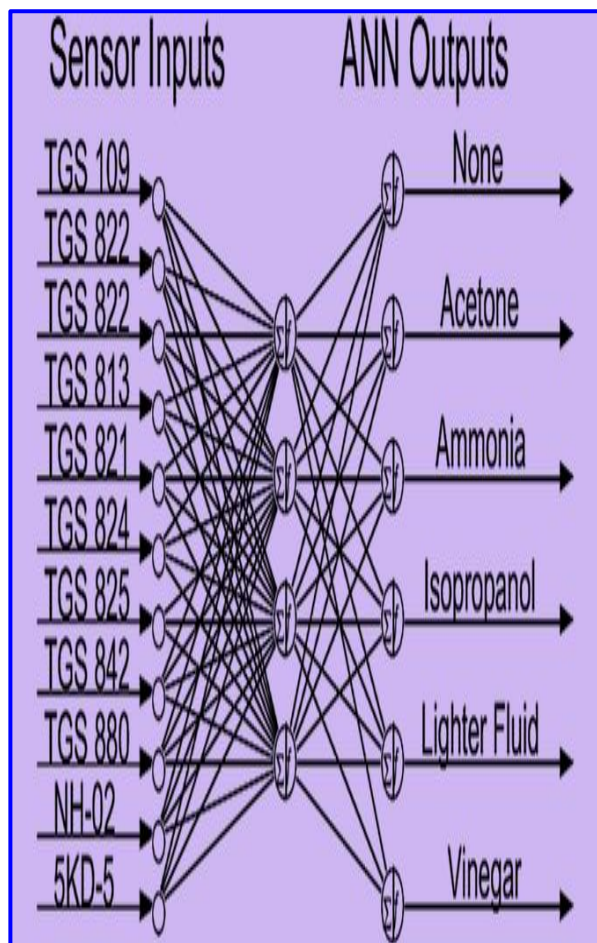


Fig. 5: Structure of a sample ANN used to classify household chemicals (Keller *et al.* 1995)

2016, have reported a detailed study on pattern recognition systems and developed an algorithm to train

3.4 Commercial Electronic Odour Detection Instruments

Many electronic gas sensors have been produced commercially for a number of years for environmental monitoring and are capable of detecting specific compound. Nimal *et al.* 2009 and Kannan *et al.* 2004 have developed handheld SAW based gas sensors for the detection of explosives and chemical warfare agents (Kannan *et al.* 2004; Nimal *et al.* 2009). Fig. 6 shows one of e-Nose device useful for different sensing applications which includes medical and food safety industries.

e-Nose device for the detection of some of volatile organic compounds and stimulants (Singh *et al.* 2016).



Fig. 6: Cyranose Electronic Nose.

Table 1. List of commercially available electric gas sensors and electronic nose devices for environmental monitoring

Product description	Manufacturer	Comments
Portable odour monitor	SensidyneInc .,USA	Hand-held monitor with pellistor element
Portable odour level indicator (XP-329)	New Cosmos Electric Co.,Japan	Hand-held monitor with pellistor element
Cyranose 320	Sensigent Intelligent sensing solutions, California	E-nose device for different sensing applications
Alabaster-UV	Europhor Instruments, France	Desk-top monitor with metal oxide element
Oral checker	National,Japan	Palm-held monitor of breath freshnesswith metal oxide (TGS 550) element
Rhino	USA	Desk-top electronic nose with four metaloxide sensing elements
The Nose	Neotronics Ltd,UK	Prototype electronic nose using 10 polymerelements to monitor beer
Intelligent Nose (Fox 2000)	Alpha MOS,France	Desk-top electronic nose with equivalentof 12 metal oxide elements
eNose Aqua and eNose QA	Sensigent Intelligent sensing solutions, California	Portable sensor designed specifically to sense contamination in refillable water bottles
Odour Mapper	UMIST Ventures,UK	Desk-top electronic nose with 20 polymer Elements
SAW DNT Sensor	SSPL-DRDO, India	Handheld device for detection of DNT - an explosive. (Non-commercial)

4. E-NOSE DEVICE - PRESENT AND FUTURE PERSPECTIVES

Present day conventional gas sensing technologies have severe performance limitations as they suffer from problems in sensitivity under varying ambient conditions in temperature, humidity etc. Such a scenario has forced development of e-Nose devices to be single application specific devices. These constraints and challenges need to be circumvented by researchers today to transform such devices into multi-application e-Nose devices.

Besides this,present e-Nosedevices suffer from problems like: sensor drift;moderate sensitivity; need for statistical analysis of the response signal;not suitable for screening of indoor airand high cost.These challenges limits their widespread applications which needs to be tackled in thefuture. Thus,it is expected that

functionalization of these devices for chemical sensing will continue to be a highly active explored area of research in the future.

5. CONCLUDING REMARKS

Electronic nose (E-Nose) devices are undoubtedly reliable sensor device for the detection of chemical and biological toxins present even in harsh environments. However, these e-Nose devices needs to be optimized for their effectiveness. Among various e-Nose devices, Surface Acoustic Wave (SAW) sensor based devices show promising results. However, development of a sensitive coating material which is sensitive to chemical and biological toxins is highly recommended in such devices. The sensitive coating materials can be either an alloy of metals, metal oxide semiconductors, polymers,derivative of carbon (e.g. carbon nanotube), or any other moisture absorbing material. Further,

identification of chemical or biological toxins requires efficient pattern recognition techniques. Therefore, integrated development of sensitive coating and the pattern recognition tools will ensure high efficiency of hand-held e-nose devices which can be then called smart e-nose devices.

ACKNOWLEDGEMENTS

The authors would like to thank the Director and all the Scientists in SAW Division, SSPL- DRDO, New Delhi, India for their support and guidance.

REFERENCES

- Abel, S. B., Olejnik, R., Rivarola, C. R., Slobodian, P., Saha, P., Acevedo, D. F., Barbero, C. A., Resistive Sensors for Organic Vapors Based on Nanostructured and Chemically Modified Polyanilines, *IEEE Sens. J.*, 18(16), 6510–6516 (2018).
doi: 10.1109/JSEN.2018.2848843
- Aid, F., CBRNE - Chemical Warfare Agents, Alizadeh, T., Hamedsoltani, L., Managing of gas sensing characteristic of a reduced graphene oxide based gas sensor by the change in synthesis condition: A new approach for electronic nose design, *Mater. Chem. Phys.*, 183, 181–190(2016).
doi: 10.1016/j.matchemphys.2016.08.017
- Anderson, T., Ren, F., Pearton, S., Kang, B. S., Wang, H. T., Chang, C. Y., Lin, J., Advances in hydrogen, carbon dioxide, and hydrocarbon gas sensor technology using GaN and ZnO-based devices, *Sensors (Switzerland)*, 9(6), 4669–4694(2009).
doi: 10.3390/s90604669
- Arshak, K., Moore, E., Lyons, G. M., Harris, J., Clifford, S., A review of gas sensors employed in electronic nose applications, *Sens. Rev.*, 24(2), 181–198(2004).
doi: 10.1108/02602280410525977
- Banu Priya, R., Venkatesan, T., Pandiyarajan, G., Hareesh M, P., SAW Devices - A Comprehensive Review, *J. Environ. Nanotechnol.*, 3(3), 106–115(2014).
doi: 10.13074/jent.2014.09.143101
- Benetti, M., Cannatà, D., Verona, E., Palla Papavlu, A., Dinca, V. C., Lippert, T., Dinescu, M., Di Pietrantonio, F., Highly selective surface acoustic wave e-nose implemented by laser direct writing, *Sensors Actuators, B Chem.*, 154–162(2019).
doi: 10.1016/j.snb.2018.12.005
- Bhasker Raj, V., Nimal, A. T., Parmar, Y., Sharma, M. U., Gupta, V., Investigations on the origin of mass and elastic loading in the time varying distinct response of ZnO SAW ammonia sensor, *Sensors Actuators, B Chem.*, 166–167, 576–585(2012).
doi: 10.1016/j.snb.2012.03.013
- Bhasker Raj, V., Singh, H., Nimal, A. T., Tomar, M., Sharma, M. U., Gupta, V., Effect of metal oxide sensing layers on the distinct detection of ammonia using surface acoustic wave (SAW) sensors, *Sensors Actuators, B Chem.* 187, 563–573 (2013).
doi: 10.1016/j.snb.2013.04.063
- Binions, R., Naik, A. J. T., Metal oxide semiconductor gas sensors in environmental monitoring, Woodhead Publishing Limited.
- Bogue, R., Technology Roadmap: Optoelectronic Gas Sensors in the Petrochemicals, Gas and Water Industries, In: Technology Roadmap: Optoelectronic Gas Sensors in the Petrochemicals, Gas and Water Industries, 01–59(2006).
- Bui, T., Morana, B., Scholtes, T., Duc, T. C., Sarro, P. M., Bui, T., Morana, B., Scholtes, T., Duc, T. C., A mixing surface acoustic wave device for liquid sensing applications: Design, simulation, and analysis A mixing surface acoustic wave device for liquid sensing applications: Design, simulation and analysis, *J. Appl. Phys.*, 120, 074504(2016).
doi: 10.1063/1.4961214
- Bunte, G., Hüttel, J., Pontius, H., Hartlieb, K., Krause, H., Gas phase detection of explosives such as 2,4,6-trinitrotoluene by molecularly imprinted polymers, *Anal. Chim. Acta.*, 591(1 SPEC. ISS.), 49–56(2007).
doi: 10.1016/j.aca.2007.02.014
- Burian, C., Brezmes, J., Vinaixa, M., Cañellas, N., Llobet, E., Vilanova, X., Correig, X., MS-electronic nose performance improvement using the retention time dimension and two-way and three-way data processing methods, *Sensors Actuators, B Chem.*, 143(2), 759–768(2010).
doi: 10.1016/j.snb.2009.10.015
- Cheeke, J. D. N., Wang, Z., Acoustic wave gas sensors, *Sensors Actuators B Chem.*, 59(2-3), 146–153(1999).
doi: 10.1016/S0925-4005(99)00212-9
- Cochrane, C., Hertleer, C., Schwarz-Pfeiffer, A., Smart textiles in health. Elsevier Ltd
- Cosio, M. S., Scampicchio, M., Benedetti, S., Electronic Noses and Tongues, *Chem. Anal. Food Tech. Appl.*, 219–247(2012).
doi: 10.1016/B978-0-12-384862-8.00008-X
- Devkota, J., Ohodnicki, P., Greve, D., SAW Sensors for Chemical Vapors and Gases, *Sensors*, 17(4), 801 (2017).
doi: 10.3390/s17040801
- Gardner, J. W., Bartlett, P. N., “A brief history of electronic noses” *Sensors & Actuators B, Sensors Actuators B*, 19(18–19), 211–220(1994).
- Gole, J. L., Lewis, S. E., Porous Silicon-Sensors and future applications, *Nanosilicon*, 149–175(2008).
doi:10.1016/B978-008044528-1.50005-1

- Gongora, A., Monroy, J., Gonzalez-Jimenez, J., An Electronic Architecture for Multipurpose Artificial Noses, *J. Sensors*, 5427693(2018).
doi: 10.1155/2018/5427693
- Gowdhaman, P., Venkatesan, T., Haresh M., P., Review of surface acoustic wave sensors for the detection and identification of toxic environmental gases/vapours, *Arch. Acoust.*, 43(3), 357–367(2018).
doi: 10.24425/123908
- Haresh M, P., Sharma, M. U., Nimal, A. T., Rajesh, K. B., Impulse Modelled Response of a 300 MHz ST-Quartz SAW Device For Sensor Specific Applications, *J. Environ. Nanotechnol.*, 2, 15–21(2013).
doi: 10.13074/jent.2013.02.nciset33
- Hosseini, M., Hamdy Makhlof, A. S., Sensory Polymers for Detecting Explosives and Chemical Warfare Agents, In: Industrial Applications for Intelligent Polymers and Coatings, 553-576(2016).
DOI: 10.1007/978-3-319-26893-4_26
- Kannan, G., Nimal, A., Mittal, U., Yadava, R. D., Kapoor, J., Adsorption studies of carbowax coated surface acoustic wave (SAW) sensor for 2,4-dinitro toluene (DNT) vapour detection, *Sensors Actuators B Chem.*, 101(3), 328–334 (2004).
doi: 10.1016/j.snb.2004.04.003
- Keller, P. E., Electronic noses and their applications, In: IEEE Northcon/Technical Appl. Conf.
- Laquintinie, P. S., Sachan, A., Feller, J. F., Lahuec, C., Castro, M., Seguin, F., Dupont, L., A functionalized carbon nanotube based electronic nose for the detection of nerve agents, *2018 25th IEEE Int. Conf. Electron. Circuits Syst., ICECS*, 2018(1), 705–708(2019).
doi: 10.1109/ICECS.2018.8617932
- Liu, X., Cheng, S., Liu, H., Hu, S., Zhang, D., Ning, H., A Survey on Gas Sensing Technology, *Sensors* 12(7), 9635–9665(2012).
doi: 10.3390/s120709635
- Majchrzak, T., Electronic Nose Technologies and Advances in Machine Olfaction, pp 202–223
- Nimal, A. T., Mittal, U., Singh, M., Khaneja, M., Kannan, G. K., Kapoor, J. C., Dubey, V., Gutch, P. K., Lal, G., Vyas, K. D., Gupta, D. C., Development of handheld SAW vapor sensors for explosives and CW agents, *Sensors Actuators, B Chem.*, 135(2), 399–410 (2009).
doi: 10.1016/j.snb.2008.08.040
- Nimal, A. T., Singh, M., Mittal, U., Yadava, R. D. S., A comparative analysis of one-port Colpitt and two-port Pierce SAW oscillators for DMMP vapor sensing, *Sensors Actuators, B Chem.*, 114(1), 316–325(2006).
doi: 10.1016/j.snb.2005.05.021
- Pandya, M. H., Design and Modelling of Surface Acoustic Wave (SAW) Devices and Sensors, Bharathiar University.
- Priya, R. B., Venkatesan, T., Pandya, H. M., A Comparison of Surface Acoustic Wave (SAW) Delay Line Modelling Techniques for Sensor Applications, *J. Environ. Nanotechnol.* 5(2), 42–47 (2016).
doi: 10.13074/jent.2016.06.162193
- Raj, V. B., Nimal, A. T., Parmar, Y., Sharma, M. U., Sreenivas, K., Gupta, V., Cross-sensitivity and selectivity studies on ZnO surface acoustic wave ammonia sensor, *Sensors Actuators, B Chem.* 147(2), 517–524 (2010).
doi: 10.1016/j.snb.2010.03.079
- Raj, V. B., Singh, H., Nimal, a T., Sharma, M. U., Gupta, V., Oxide thin films (ZnO, TeO₂, SnO₂, and TiO₂) based surface acoustic wave (SAW) E-nose for the detection of chemical warfare agents, *Sensors Actuators, B Chem.* 178, 636–647 (2013).
doi: 10.1016/j.snb.2012.12.074
- Raj, V. B., Fabrication of Metal Oxide Thin Films based Surface Acoustic Wave (SAW) Sensors for the Detection of Toxic Vapors / Gases, University of Delhi
- Sayago, I., Aleixandre, M., Santos, J. P., Development of Tin oxide-based nanosensors for electronic nose environmental applications, *Biosensors*.
doi: 10.3390/bios9010021
- Schaller, E., Bosset, J. O., Escher, F., “Electronic Noses” and Their Application to Food, *Acad. Press* 31(4), 305–316 (1998).
- Scott, S. M., James, D., Ali, Z., Data analysis for electronic nose systems, *Microchim. Acta* 156(3-4), 183–207 (2006).
doi: 10.1007/s00604-006-0623-9
- Sharma, M. U., Kumar, D., Koul, S. K., Venkatesan, T., Pandiyarajan, G., Nimal, A. T., Kumar, P. R., Pandya, H. M., Modelling of SAW Devices for Gas Sensing Applications – A Comparison, *J. Environ. Nanotechnol* 3(4), 63–66 (2014).
doi: 110.13074/jent.2014.12.144110
- Singh, H., Raj, V. B., Kumar, J., Durani, F., Mishra, M., Nimal, A. T., Sharma, M. U., SAW mono sensor for identification of harmful vapors using PCA and ANN, *Process Saf. Environ. Prot.* 102, 577–588 (2016).
doi: 10.1016/j.psep.2016.05.014
- Tripathi, K. M., Sachan, A., Castro, M., Choudhary, V., Sonkar, S. K., Feller, J. F., Green carbon nanostructured quantum resistive sensors to detect volatile biomarkers, *Sustain. Mater. Technol.* 16(2017), 1–11 (2018).
doi: 10.1016/j.susmat.2018.01.001
- Venkatesan, T., Haresh M, P., Surface Acoustic Wave Devices and Sensors - A Short Review On Design and Modelling by Impulse Response, *J. Environ. Nanotechnol.*, 2(3), 81–89(2013).
doi: 10.13074/jent.2013.09.132034

- Venkatesan, T., Pandya, H. M., Surface Acoustic Wave Devices and Sensors - A Short Review On Design and Modelling by Impulse Response, *J. Environ. Nanotechnol.* 2(3), 81–90 (2013).
- War, F. W., War, S. W., Annex 1: chemical agents 1., Xu, Y.-L., He, J., Sensors and sensory systems, In: Smart Civil Structures. CRC Press, Boca Raton : Taylor & Francis, CRC Press, 2017., pp 61–85